




Leading - edge Technology

- ▶ DC input voltage up to 800V
- ▶ Maximum efficiency of 97.9%
- ▶ Internal DC switch
- ▶ Transformerless
- ▶ Compact design
- ▶ Multi MPP controller
- ▶ MTL - String
- ▶ Bluetooth / RF technology / Wi-Fi
- ▶ Sound control
- ▶ Easy installation
- ▶ Comprehensive Growatt warranty program

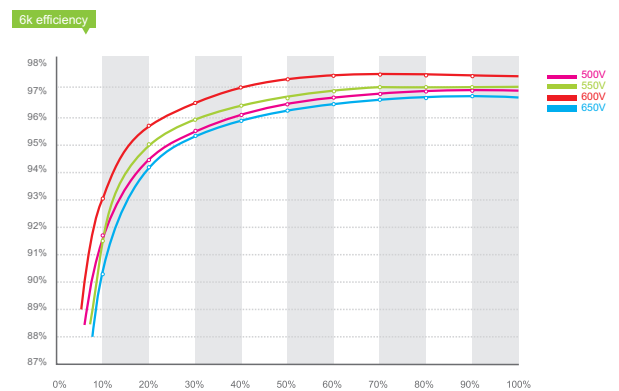

GROWATT NEW ENERGY TECHNOLOGY Co.,LTD

A: Building B, Jiayu Industrial Zone, #28 Guanghui Road, Longteng Community, Shiyan, Baoan District, Shenzhen, P.R.China.

T: + 86 755 2747 1900 F: + 86 755 2749 1460 E: info@ginverter.com

	Growatt 4000 TL3	Growatt 5000 TL3	Growatt 6000 TL3
Input Data			
Max. DC power	4200W	5200W	6300W
Max DC voltage	800V	800V	800V
Start Voltage	150V	150V	150V
PV voltage range	140V - 800V	140V - 800V	140V - 800V
MPP voltage range / DC nominal voltage	200V - 800V / 580V	200V - 800V / 580V	200V - 800V / 580V
Full load voltage range	250V - 750V	250V - 750V	250V - 750V
Number of independent MPP trackers/strings per MPP tracker	2/1	2/1	2/1
Max. input current	9A / 9A	9A / 9A	10A / 10A
Max. input current per string	16A	16A	16A
Output (AC)			
Rated AC output power	4000W	5000W	6000W
Max. AC power	4000VA	5000VA	6000VA
Max. output current	6.4A	7.9A	9.3A
Max. short-circuit current	20A	20A	20A
AC voltage range; range	3/N/PE, 230V/400V 185 - 260V	3/N/PE, 230V/400V 185 - 260V	3/N/PE, 230V/400V 185 - 260V
AC grid frequency; range	50/60Hz; 44-55Hz/54-65Hz	50/60Hz; 44-55Hz/54-65Hz	50/60Hz; 44-55Hz/54-65Hz
Power factor at rated power	1	1	1
Adjustable displacement power factor	0.8 leading -0.8lagging	0.8 leading -0.8lagging	0.8 leading -0.8lagging
THDI	<3%	<3%	<3%
AC connection	Three phase	Three phase	Three phase
Efficiency			
Max. efficiency	97.9%	97.9%	97.9%
Euro - eta	96.5%	96.6%	96.8%
MPPT efficiency	99.5%	99.5%	99.5%
Protection Devices			
DC reverse polarity protection	yes	yes	yes
DC switch for each MPPT	yes	yes	yes
Output AC overcurrent protection	yes	yes	yes
Output AC overvoltage Protection - Varistor	yes	yes	yes
Ground fault monitoring	yes	yes	yes
Grid monitoring	yes	yes	yes
Integrated all-pole sensitive leakage current monitoring unit	yes	yes	yes
General Data			
Dimensions (W / H / D) in mm	560/433/200	560/433/200	560/433/200
Weight	30KG	35KG	35KG
Operating temperature range	-25 °C ... +60 °C	-25 °C ... +60 °C	-25 °C ... +60 °C
Noise emission (typical)	≤ 35 dB(A)	≤ 35 dB(A)	≤ 35 dB(A)
Self-consumption night	< 0.5W	< 0.5W	< 0.5W
Topology	Transformerless	Transformerless	Transformerless
Cooling concept	Natural	Natural	Natural
Environmental Protection Rating	IP 65	IP 65	IP 65
Altitude	2000m without derating	2000m without derating	2000m without derating
Relative Humidity	0~95%	0~95%	0~95%
Features			
DC connection	H4/MC4(opt)	H4/MC4(opt)	H4/MC4(opt)
AC connection	Screw terminal	Screw terminal	Screw terminal
Display	LCD	LCD	LCD
Interfaces: RS232/R485/Bluetooth/RF/Wi-Fi	yes / yes / opt / opt / opt	yes / yes / opt / opt / opt	yes / yes / opt / opt / opt
Warranty:5 years / 10 years	yes / opt	yes / opt	yes / opt
Certificates and Approvals			